

E-GATE® USER MANUAL



Thank you for your purchase!

We are committed to providing you with a high-quality product and exceptional customer service.

Please scan the below barcode to register your product immediately.



This product comes with 1-year offsite manufacturer warranty.

How to get Warranty

1. Scan the above code to get to the nearest service center.
2. If you cannot locate one, call us on below numbers or send the product to our central service center by raising a service ticket by scanning the above code.

For any questions or concerns, please do not hesitate to reach out to our customer service team. We are here to help!

Phone: +91-70651-79993/4/5

Email: support@egate-world.com

Website: www.egate-world.com

Thank you for choosing Egate. We appreciate your business and strive to ensure complete peace of mind


E. & O.E. : Any matter or legal dispute will be entertained in the jurisdiction of Noida Court only.

1 Important Notes

How to use the device correctly:

1. Do not point the lens towards the human eye to avoid damage to the eyes caused by the strong light of the lens after the machine is turned on.
2. Please do not block the air inlet/outlet of the device to avoid damage to the internal electronic devices due to the failure of the device to dissipate heat normally.
3. Do not use paper, cloth and other cleaning tools to directly wipe the lens to avoid damage to the lens; please use a cleaning air blower to remove dust on the surface of the lens.
4. Please keep the device and its parts and accessories out of the reach of children.
5. Please ensure that the device is used in a dry and ventilated environment.
6. Do not store and use the device in overheated or cold places. High (low) temperature will shorten the life of electronic devices; the allowable operating environment is 0°C~35°C.
7. Do not forcefully squeeze the device or place shields above or on its back to avoid damage to the device.
8. Do not drop, knock or strongly vibrate the device to cause damage to the internal circuit board.
9. Do not attempt to disassemble the device without permission; if there is any problem, please contact the after-sales service.
10. Do not repair any products by yourself; if the equipment or any parts are not working properly, you should consult the after-sales service or return to the factory for repair.
11. The equipment must not be exposed to water droplets or splashes, and objects filled with liquids such as vases should not be placed on the equipment.


2 Projector

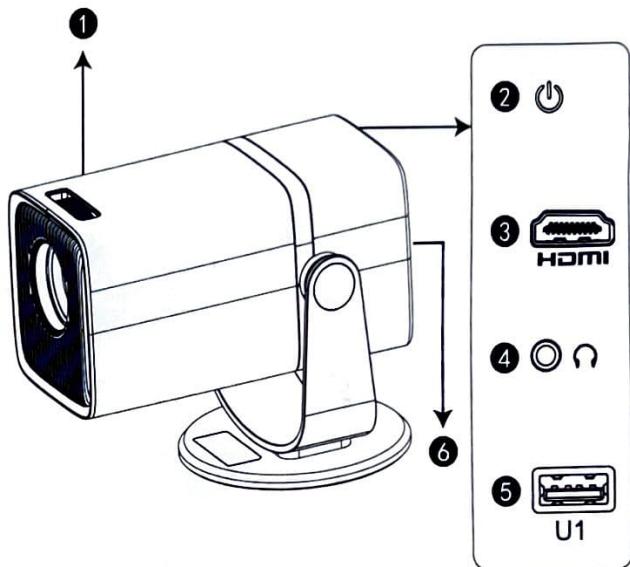

Note: The appearance of the product is subject to the actual product. This picture is for reference only.

1. Manual focus
2. Power button
3. HD input
4. Headphone output
5. Multimedia Input
6. Power input (110-240v~)

3 Remote control

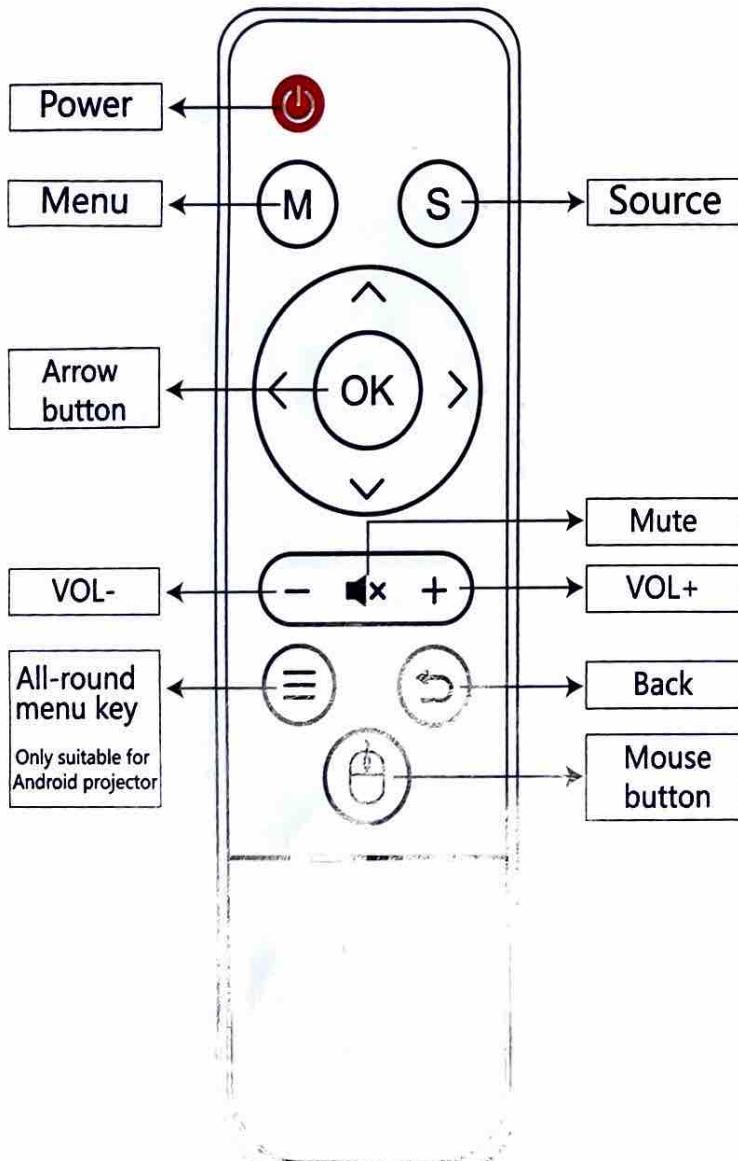

4 Device on/off

Step 1: Take out the machine from the packing box, remove the packing bag and lens cover, place the projector on a basic level table, plug in the matching power cord, and then connect to the AC power supply. At this time, the indicator light on the projector panel is Standby red.

Step 2: Press the on-off button "⊕" on the body or the on-off button "⊕" on the remote control to start the projector. At this time, the indicator light on the projector panel turns solid blue and the lens emits light, and the projector is started.

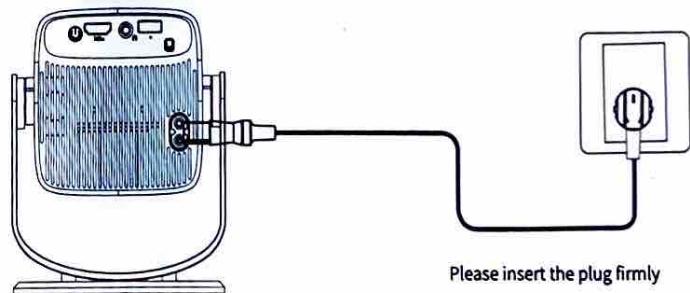



Image adjustment

Please follow the below steps to correct:

1. Adjust the image size to get the best image size

Settings ▶ Projector Setting ▶ Scale

2. Rotate the Focus the dial to get the best focus

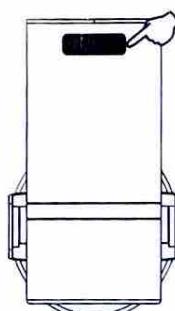


Focus the dial

3. Use the keystone function (auto keystone& Four Point Corr) of the projector to get a rectangle projection screen.

Settings ▶ Projector Setting ▶ auto keystone
Four Point Corr

5 Projector connection

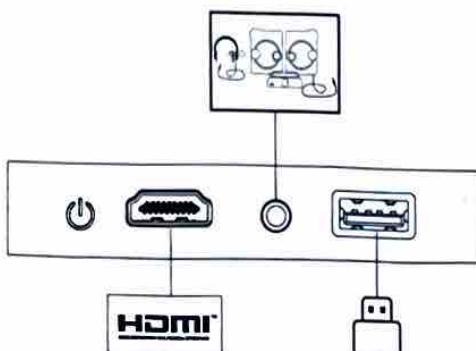

1. Selection of signal source

Press the signal source key "S" on the remote control to enter the signal source menu interface. Use the arrow keys and the confirm key to select the desired signal source.

2. Computer connection

Connect the computer through the projector: HDMI (high-definition interface)

Steps: switch the projector signal source > connect the corresponding data cable > switch the notebook output mode

Method: 1: XP system Fn + dual screen key (F1--F12 draws two screens), switch 2-3 times

Method 2: The computer operating system is Windows7 and above for users of Windows7,

Just press +P on your keyboard, select the "Copy" option to connect.

If the above operation does not work, please update your computer's graphics card driver.

Attachment: The output buttons of different brands of notebooks are as follows:

Lenovo	Fn+F3
Dell	Fn+F8
HP	Fn+F4
ThinkPad	Fn+F7
Asus	Fn+F8
Acer	Fn+F5
Samsung	Fn+F4
Sony	Fn+F7

Fujitsu	Fn+F10
Haier	Fn+F3
NEC	Fn+F3
Panasonic	Fn+F3
Sharp	Fn+F5
Hitachi	Fn+F7
TOSHIBA	Fn+F5

3. AV video equipment connection

Connect the 3in1 video adapter cable to the AV interface of the projector, and select the multimedia signal channel: "AV".

4. 3.5mm audio device connection

It can be connected to 3.5mm headphones and other wired audio equipment.

6 Wireless projection

IOS device

Airplay: Using this function, the projector and iPhone/iPad can be displayed on the same screen.

Note: Make sure the projector and the phone are connected to the same WiFi network (or the same hotspot).

The operation steps on the mobile terminal are as follows (the projection terminal does not need to be set);

Step 1: Swipe up at the bottom of the phone screen

Step 2: The console interface appears, click the AirPlay button

Step 3: Select the device you want to cast to and turn on the mirroring switch

The name of the projection device can be defined in the screen projection APP, which is subject to the specific machine; it is recommended to connect Receive 5G WiFi to avoid the same screen stuck;

Android device

Miracast: Using this function, the projector and Android phone/tablet can be displayed on the same screen Show.

The operation steps of the projector and mobile phone are as follows:

Step 1: Projector, go to Settings>Network Switch>Turn on WiFi Switch, no need to connect to the Internet network;

Step 2: On the mobile phone (take Xiaomi as an example), open the WiFi port, go to Settings > Other Connections Type>Wireless Display;

Step 3: During the connection process, a connection invitation appears on the projector, click Accept.

Different mobile phones have different Miracast setting paths and names. Common names are: Media Input Output/projection screen/multi-screen interaction, etc. Please refer to the mobile phone for details.

Note: Due to the variety of mobile phones, it cannot be guaranteed that all mobile phone models are compatible with the same screen

Note: Due to the variety of mobile phones, it cannot be guaranteed that all mobile phone models are compatible with the same screen

7 Maintenance of the projector

Smart projector is a high-tech product integrating precision optics, electronics and machinery. If it is not properly maintained in daily use, it will affect the performance of the projector. Longevity and effectiveness. The importance of maintaining the projector is as follows:

1. Dustproof: Due to the influence of the environment, excessive dust on the projector will affect the heat dissipation. Clean the dust filter of the projector in one and a half months in actual environment.
2. Ventilation: Since the projector is an integrated sound and photoelectric device, the light source generates heat when it works by itself. During installation and use, make sure that there are no objects around to block the entrance of the projector. The air vent and the air outlet, because the heat dissipation of the projector depends on the convection of cold air to improve the projector's performance. Working stability and longevity.
3. Lens maintenance: The lens is the core component of the projector, which is directly related to the clarity of the picture. Sharpness and effect. Too much dust on the lens will affect the image quality. When the lens is dirty, please use a soft Wipe the glass on the surface of the lens with a cotton cloth, do not use a hard cloth or something corrosive. Wipe the lens.
4. Cleaning: Please clean up the excessive dust on the surface of the projector in time, too much dust will affect the fuselage heat dissipation.
5. Moisture-proof: The projector is easily attacked by humid air, and the working humidity of the projector is about Between 45%-60%, the air is too humid and will affect the working stability of the projector.
6. Shockproof: The projector must be strictly prevented from strong impact, extrusion and vibration. especially when the machine is Try not to move and knock the projector during normal work, it may cause the internal electricity of the machine. road failure.
7. Do not install the projector on an unstable, shaky or uneven table.
8. Do not place containers filled

8 Warranty Card

